Service Manual

NMZ-3300D
NMZ-3600D

Recorders tape deck

MARA-00616

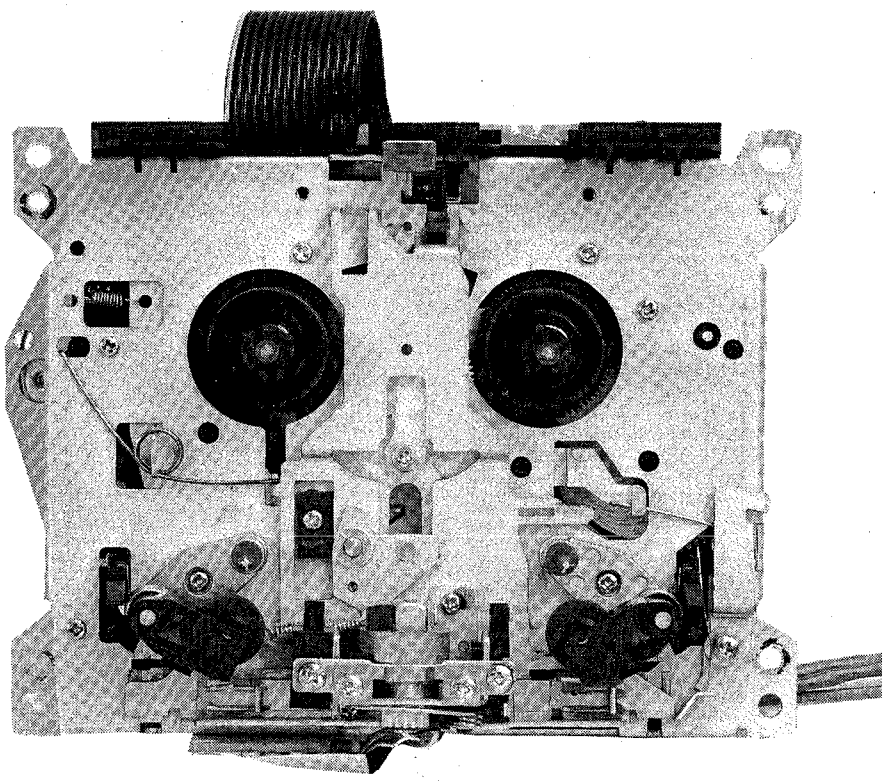

(GB)

Safety regulations require that the set be restored to its original condition and that parts which are identical with those specified be used.

marantz®

model NMZ-3300D/3600D

First issue: 1990

4822 725 50933

EXPLODED VIEW

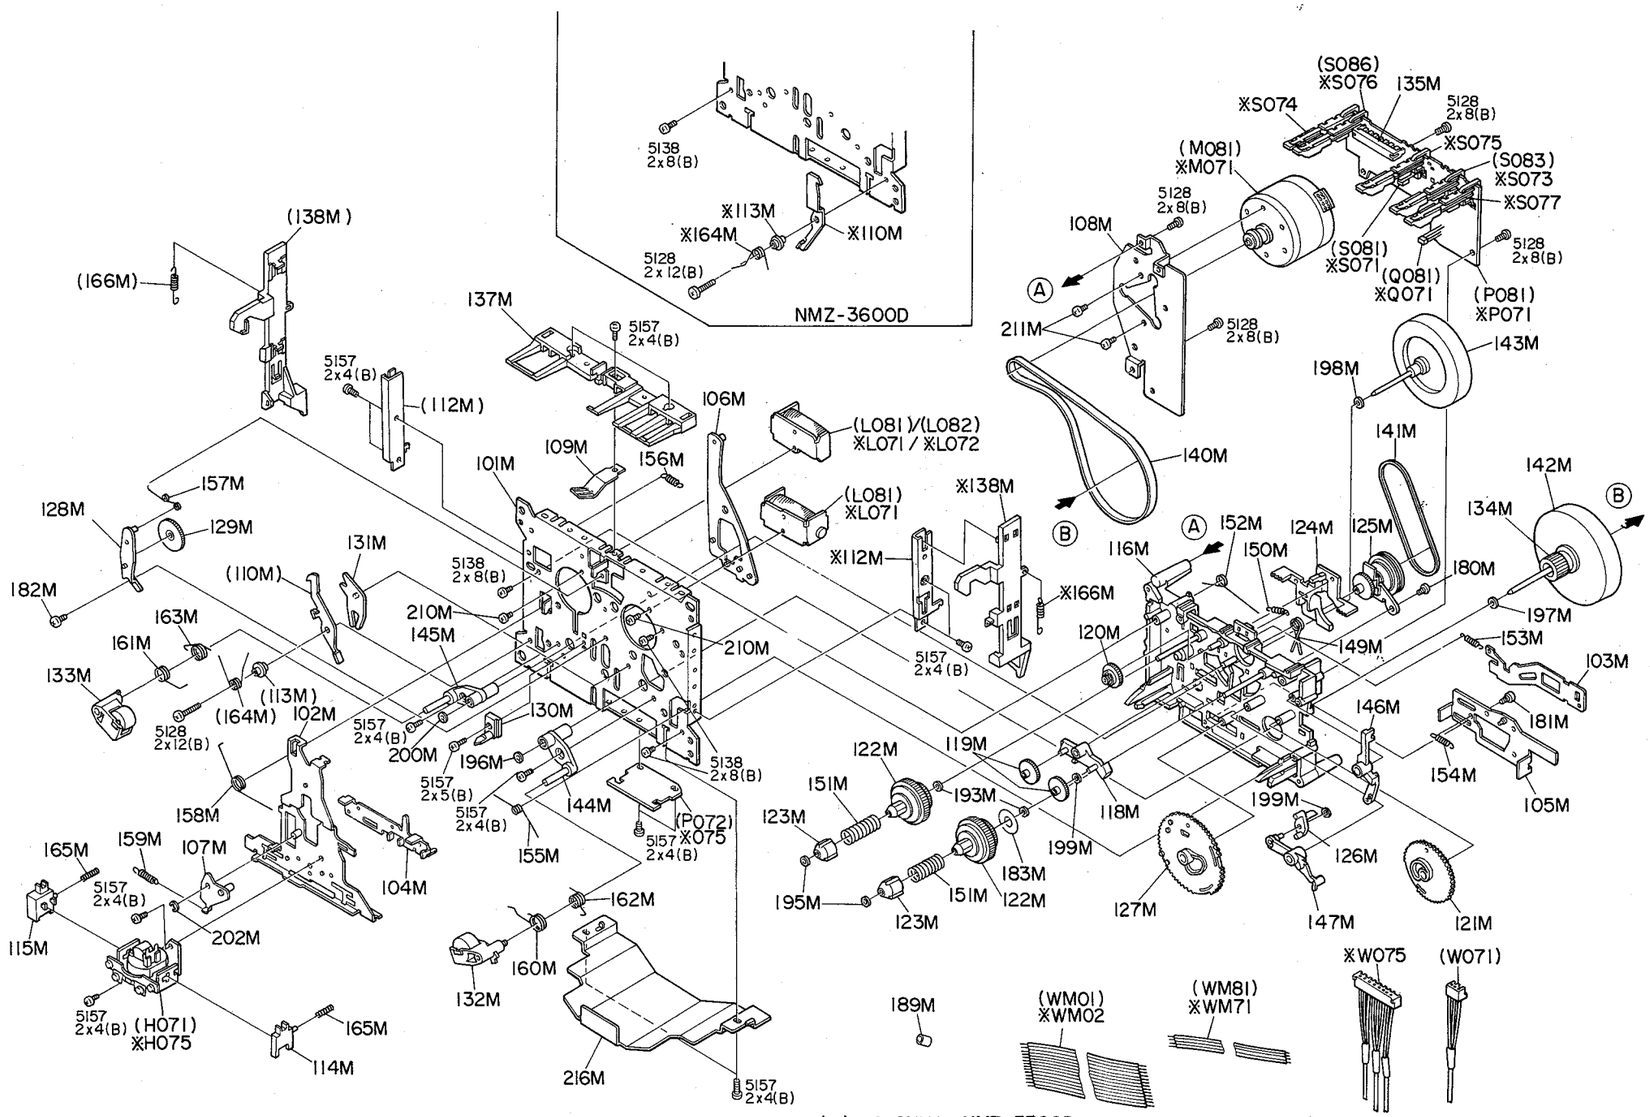

( ) : A ONLY ; NMZ-3300D
※ : B ONLY ; NMZ-3600D

REF. DESIG.	PART NO.	DESCRIPTION	
109M	4822 492 70801	Leaf Spring, Pack	
114M	4822 403 70196	Guide (R), Tape	
115M	4822 403 70197	Guide (L), Tape	
119M	4822 522 32973	Gear, FR	
120M	4822 522 32974	Gear, REW	
121M	4822 522 32977	Gear, F/R	
122M	4822 528 10806	Reel(B) Assembly	
123M	4822 462 71718	Cap(B), Reel	
125M	4822 528 20717	Clutch(B) Assembly	
127M	4822 522 32975	Gear(B), PL Cam	
128M	4822 403 70195	Arm, Play Gear	
129M	4822 522 32976	Gear, Play	
130M	4822 403 70198	Guide, Cassette	
132M	4822 528 81424	Roller(R) Assembly, Pinch	
133M	4822 528 81425	Roller(L) Assembly, Pinch	
134M	4822 528 60377	Gear, Flywheel	
140M	4822 358 31097	Belt(M), Drive	
141M	4822 358 31098	Belt(F), Clutch	
142M	4822 528 60378	Flywheel(RE)	
143M	4822 528 60379	Flywheel(LE)	
149M	4822 492 42484	Spring(A), FR Arm	
150M	4822 492 42485	Spring(B), FR Arm	
151M	4822 492 33211	Spring(F), Reel	
152M	4822 492 70802	Spring, Brake	
153M	4822 492 42486	Spring(C), FR Lever	
154M	4822 492 33212	Spring, FR Lever	
155M	4822 492 33213	Spring, FR Shift	
156M	4822 492 42487	Spring, PL Trigger	
157M	4822 492 33214	Spring, Play Arm	
158M	4822 492 42488	Spring, Head Chassis	
159M	4822 492 42489	Spring, Shift Arm	
160M	4822 492 33215	Spring, P Roller(R)	
161M	4822 492 42491	Spring, P Roller(L)	
162M	4822 492 42492	Spring, P Roller Arm(R)	
163M	4822 492 42493	Spring, P Roller Arm(L)	
164M	4822 492 42494	Spring, Eject Lock Arm NMZ-3600D	
	4822 492 42496	Spring, Eject Lock Arm NMZ-3300D	
165M	4822 492 42495	Spring, Tape Guide	
166M	4822 492 33216	Spring, Eject Lever	
H071	4822 249 30167	Rotation Head Assembly NMZ-3300D	
H075	4822 249 10421	Rotation Head Assembly NMZ-3600D	
L071	4822 281 50154	Solenoid Coil	NMZ-3600D
L801	4822 281 50154	Solenoid Coil	NMZ-3300D
M071	4822 361 30321	D.C. Motor Assembly	NMZ-3600D
M081	4822 361 30321	D.C. Motor Assembly	NMZ-3300D
Q071	4822 130 82364	Photo Unit	NMZ-3600D
Q081	4822 130 82364	Photo Unit	NMZ-3300D
S071	4822 271 30734	Mini Switch, Play	NMZ-3600D
S073	4822 271 30733	Mini Switch, Tape	NMZ-3600D
S074	4822 271 30733	Mini Switch, Rec(L)	NMZ-3600D
S075	4822 271 30733	Mini Switch, Metal	NMZ-3600D
S076	4822 271 30733	Mini Switch, CrO_2	NMZ-3600D
S077	4822 271 30733	Mini Switch, Rec(R)	NMZ-3600D
S081	4822 271 30734	Mini Switch, Play	NMZ-3300D
S083	4822 271 30733	Mini Switch, Tape	NMZ-3300D
S086	4822 271 30733	Mini Switch, CrO_2	NMZ-3300D
W075	4822 321 60986	Connective Cord, 8P	NMZ-3600D